EGAlift

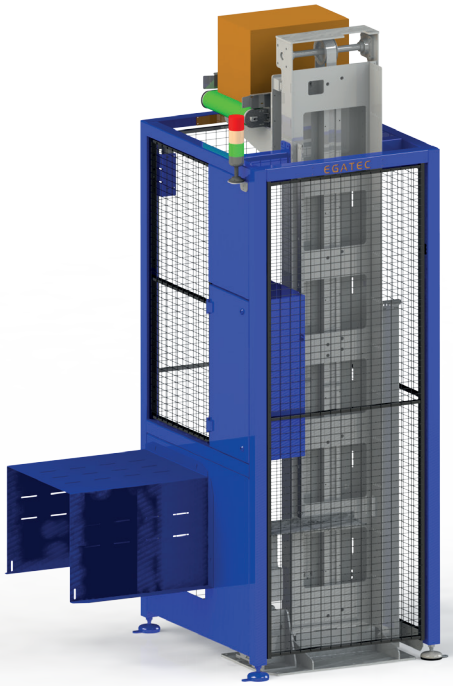

EGAlift – case elevator for efficient product flow

Case elevator EGAlift consists of two standard components – our own linear guiding system and our conveyor. Both can be customized for your needs, so there are virtually no limitations on how many cases or how high or low EGAlift operates.

Functions:
- Adaptable to all case sizes
- Modular
- Silent operation
- 7 lift/min.
- Built in reject function
- Can deliver cases to two sides
- Can deliver cases in different height positions

Options:
- Configurable conveyor
- Stainless steel edition
- Special lifting height

EGATEC PACKAGING INT.

Specifications:

Capacity/cycle time	8 sec./lift
Product weight	Max. 50kg.
Lifting height	2500mm (Configurable)
Delivery height	Can deliver cases in different height positions
Reject function	On both sides
Conveyor length	530mm (Configurable)
Conveyor width	400mm (Configurable)
Colour	Configurable
Material	Painted and zinc plated steel On request in stainless steel
Air consumption	None
Voltage	230/400 V AC
Power consumption	1,1 kW, depending on speed, lifting height and product weight
Case size	Configurable
Weight	300kg, depending on configuration
Dimensions (L x W x H)	1120 x 950 x 2860mm (standard) Configurable

EGAlift is assembled and tested in our own testing and assembly facility prior to delivery. EGAlift is delivered with all necessary documentation.

Hvidkærvej 3 · DK-5250 Odense SV · +45 62228010 · contact@egatec-packaging.com · www.egatec-packaging.com